


Schaerer Coffee Art C TOUCH Utility Specifications

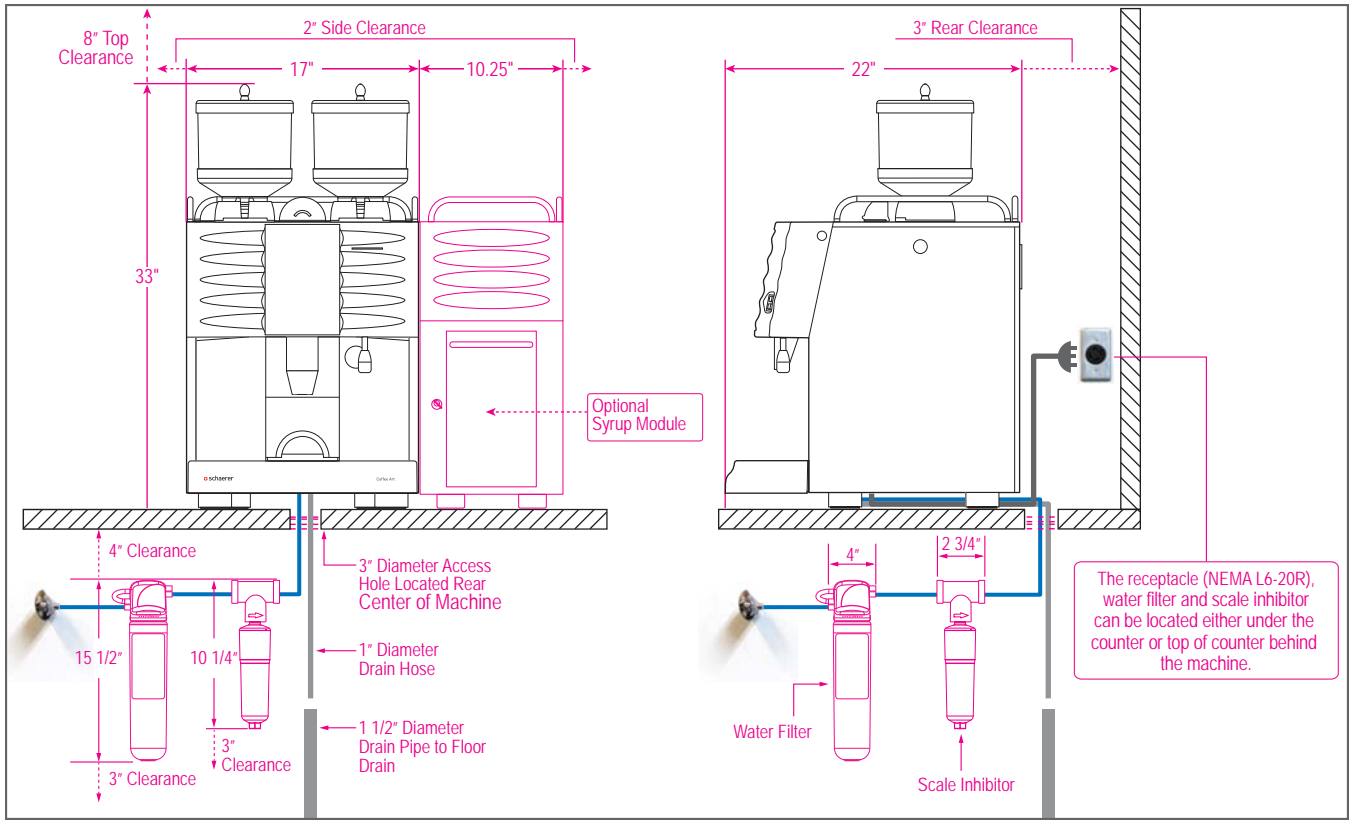

POWER, WATER SUPPLY, AND ACCESS REQUIREMENTS

	<ul style="list-style-type: none"> • Receptacle type: NEMA L6-20R • 3 Prong twist-lock • Breaker panel: 20 Amp dedicated 220V single phase circuit • Actual maximum load: 16 Amps 	<p>The receptacle, water shut-off valve and drain pipe must be within 3 feet (36") of the center of the location (footprint) of the machine.</p> <p>Ideal under counter space for softener: 30" (minimum requirement: 26").</p>
	<ul style="list-style-type: none"> • Access hole with collar (no sharp edges) • Located centrally under machine for water and drain hose • Diameter: Minimum 3" 	
	<ul style="list-style-type: none"> • Water shut-off valve with 3/8" compression fitting • Back flow preventer in accordance with local requirements 	
	<ul style="list-style-type: none"> • Drain pipe to floor drain • Copper or PVC in accordance with local health codes and regulations • Diameter: 1.5" or larger 	

Notes: Access hole is only required if any of the utility hook-ups are located under the counter.